

Emergency shower and eyewash


- Total way out valve shower, manual and instant opening.
- Emergency eyewash with high flow at low pressure.
- Emergency shower activated through rigid lever with triangle handle.
- Emergency eyewash activated through side lever.
- Double aerated jet with dust cover.
- Color green RAL 6029.
- Suitable for industries, laboratories and generally where there is risk of personal damages from fire, acids, chemical reactants, petroleum products, radioactive materials or other contaminants.
- CE conformity.



TECHNICAL DATA

- Shower head and eyewash bowl made of stainless steel.
- Manufactured body made of zinc galvanized steel with epoxy paint.
- Connecting parts in brass.
- Min. required water flow: 6 liters / minute (2 bar).
- Eyewash flow: 14 liters / minute ± 10%.
- Emergency shower flow: 120 liters / minute (3 bar).
- Water inlet: 1+1/4" thread.
- Water outlet: 1+1/4" thread.

TECHNICAL DRAWING

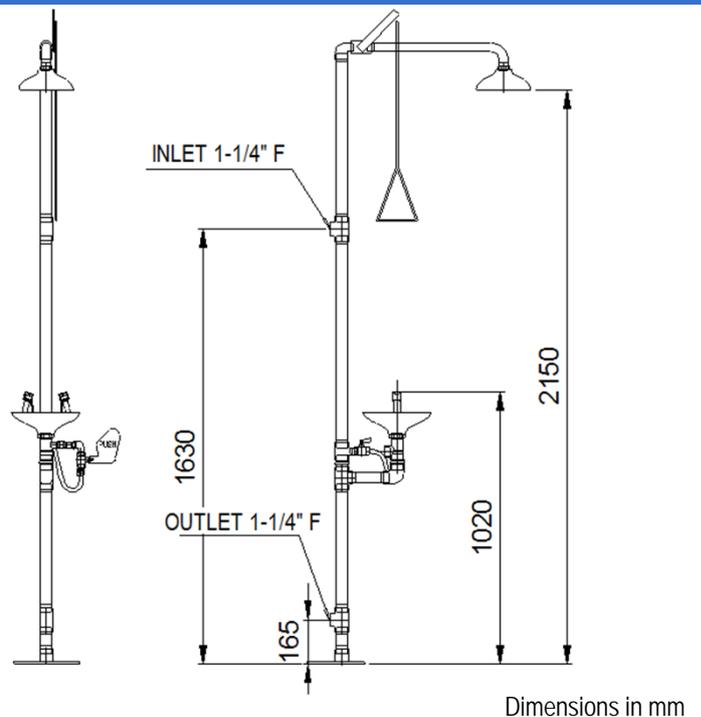

SUGGESTED TEXT FOR PRESCRIPTION

NOFER or similar emergency shower and emergency eyewash. Total way out valve shower, manual opening and eyewash with high flow at low pressure. Body made of galvanized zinc steel and covered with epoxy paint. Shower head and eyewash bowl made of stainless steel. Eyewash flow: 14 l/min±10%. Shower flow: 120 l/min.



Related Products

